



## Installation Instructions for Part # 19443 Push Button Limit Switch Kit (1 Switch w/ Bracket)

### Kit Includes:

1	#19441 switch	2	#18110 Self Drilling Bolt	1	#16122 18 ga. ring terminal
1	#19448 mounting bracket	1	#16118 18 ga. terminal		

### You will need:

- 1) You will need to provide or fabricate something to trip each limit switch. This will vary depending upon where the switches are installed and what type of device they are controlling.


### Pre-Install:

- 1) Decide which function you want to control with this switch. The switch included with this kit may be used to limit 1 motor's travel in 1 direction.
- 2) Determine which "channel" this function coincide with on your remote key fob. The key fob buttons are labeled I-VI (1-6). Write down which channel will correspond to the switch.

- Switch 1 controls Channel \_\_\_\_\_

### Installation Instructions:

- 1) Determine where you will mount the limit switch. To use the included wires, the limit switch should be mounted within 15' of the control box.
- 2) Disconnect the battery wires feeding the control box.
- 3) Remove cover from spade terminals on the box.
- 4) Connect **one** wire from the switch to the appropriate spade terminal as shown below.
- 5) Connect the remaining switch wire to the negative terminal on the control box.
- 6) Tear section of terminal cover out that corresponds to the now filled terminal and replace cover over remaining terminals
- 7) Reconnect the battery wires feeding the control box.
- 8) Program the box to allow function of the limit switch (see "Black Box" features instructions)
- 9) Mount the limit switches and make sure that the wires are securely routed.

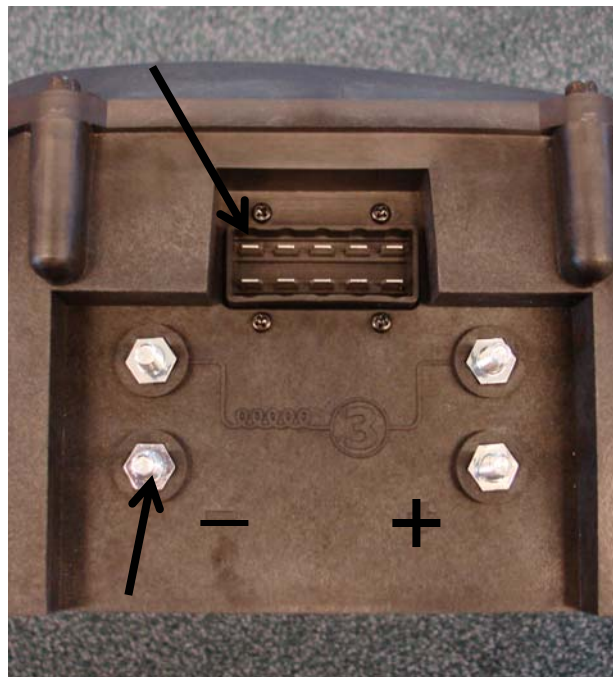

If you have any questions, please call our Customer Service Department at 1-800-297-9905.